

EDR型磁心 EDR Cores

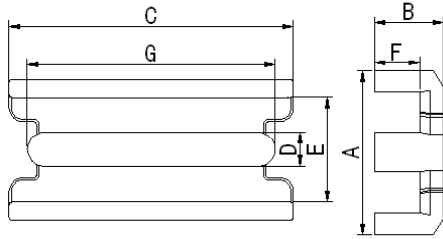


图1 Fig.1

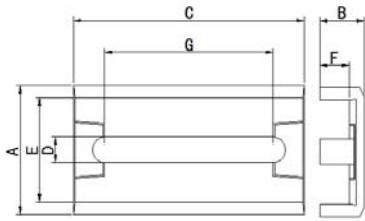


图2 Fig.2

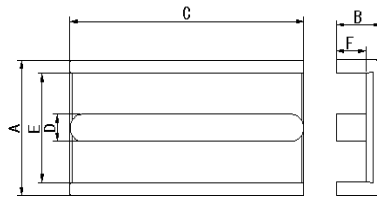


图3 Fig.3

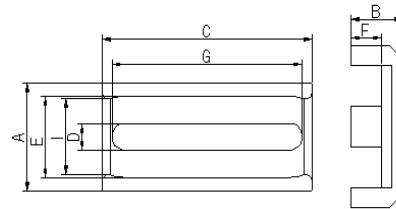


图4 Fig.4

产品型号 Type	图号 Fig	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	I
EDR20/4.5/13.7F	2	13.7±0.6	4.5±0.25	20.0±0.6	2.8±0.3	10.2min	2.7±0.25	15.8±0.5	
EDR25/5.1/13F	2	13.0±0.6	5.1±0.2	25.2±0.6	3.0±0.2	9.4min	3.3±0.25	21.5±0.5	
EDR25/4.6/12.4F	1	12.4±0.6	4.6±0.2	25.2±0.6	3.0±0.2	8.8min	3.25±0.25	22.0±0.5	
EDR26/4.5/13.7F	2	13.7±0.6	4.5±0.25	25.2±0.6	2.8±0.3	10.3min	2.7±0.25	21.5±0.5	
EDR28/4.6/13.3F	4	13.3±0.3	4.6±0.2	28.0±0.5	3.3±0.2	9.7min	2.9±0.25	25.1±0.5	8.8min
EDR39/4.5/13.7F	2	13.7±0.6	4.5±0.25	39.0±0.6	2.8±0.3	10.2min	2.7±0.25	34.5±0.5	
EDR40/4.6/13.6F	3	13.6±0.3	4.6±0.2	40.0±0.6	3.0±0.15	10.0min	3.2±0.25		

产品型号 Type	磁心参数 Core parameter				AL(nH/N ²)				重量 weight (g/prs)
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	ACP40 (±25%)	ACP44 (±25%)	ACP47 (±25%)	ACP95 (±25%)	
EDR20/4.5/13.7F	0.716	36.70	51.3	2023.1	3500	3500	3500	4200	10.4
EDR25/5.1/13F	0.527	39.92	75.8	3025.9	4300	4300	4300	5160	15.6
EDR25/4.6/12.4F	0.315	23.20	73.6	1707.5	5000	5000	5000	6000	8.8
EDR26/4.5/13.7F	0.516	35.62	69.0	2457.5	4500	4500	4500	5400	12.7
EDR28/4.6/13.3F	0.452	37.84	83.7	3167.7	5150	5150	5150	6180	16.3
EDR39/4.5/13.7F	0.328	37.68	114.9	4328.0	7000	7000	7000	8400	22.3
EDR40/4.6/13.6F	0.209	25.10	120.0	2916.0	8000	8000	8000	9600	15.0