


# EE型磁心 EE Cores



| 产品型号<br>Type    | 尺寸 Dimensions (mm) |           |           |           |         |          |
|-----------------|--------------------|-----------|-----------|-----------|---------|----------|
|                 | A                  | B         | C         | D         | E       | F        |
| EE8.3/4.5/4F    | 8.3±0.3            | 4.5±0.2   | 3.8±0.2   | 1.95max   | 5.8min  | 3.4±0.2  |
| EE10.2/5.8/10F  | 10.2±0.3           | 5.8±0.2   | 9.8±0.2   | 2.4±0.2   | 7.8±0.2 | 4.6±0.2  |
| EE10.2/5.5/5F   | 10.2±0.3           | 5.5±0.2   | 4.85±0.15 | 2.4±0.15  | 7.8±0.2 | 4.3±0.2  |
| EE10.2/5.5/7F   | 10.2±0.4           | 5.5±0.2   | 7.0±0.25  | 2.4±0.2   | 7.6min  | 4.3±0.2  |
| EE10.6/5.5/5F   | 10.6±0.3           | 5.5±0.2   | 4.85±0.2  | 2.5±0.15  | 8.3min  | 4.3±0.2  |
| EE13/6.35/6F    | 13.0±0.4           | 6.35±0.2  | 5.90±0.2  | 2.6±0.2   | 9.80min | 4.95±0.2 |
| EE13/6.2/6F     | 13.0±0.4           | 6.2±0.2   | 5.9±0.2   | 2.6±0.2   | 9.8min  | 4.8±0.2  |
| EE13/6.5/10F    | 13.0±0.4           | 6.5±0.2   | 9.8±0.2   | 3.55±0.15 | 8.9min  | 4.6±0.2  |
| EE13.3/6.45/6F  | 13.3±0.3           | 6.45±0.2  | 5.9±0.2   | 2.6±0.2   | 10.2min | 4.95±0.2 |
| EE14/6.65/10F   | 14.0±0.4           | 6.65±0.2  | 10.0±0.2  | 3.7±0.2   | 10.3min | 4.85±0.2 |
| EE16.2/7.65/10F | 16.2±0.3           | 7.65±0.2  | 10.0±0.2  | 4.0±0.2   | 12.3min | 5.65±0.2 |
| EE16/7.5/5F     | 16.0±0.4           | 7.5±0.2   | 4.8±0.2   | 4.0±0.2   | 11.7min | 5.5±0.2  |
| EE16C/7.5/5F    | 16.0±0.4           | 7.5±0.2   | 5.0±0.15  | 4.0±0.2   | 11.7min | 5.5±0.2  |
| EE16/7.6/6.5F   | 16.0±0.4           | 7.6±0.2   | 6.5±0.2   | 4.0±0.2   | 11.7min | 5.6±0.2  |
| EE16/7.5/7F     | 16.0±0.4           | 7.5±0.2   | 6.8±0.2   | 4.0±0.2   | 11.7min | 5.5±0.2  |
| EE16/7.5/8F     | 16.0±0.4           | 7.5±0.2   | 8.0±0.2   | 4.0±0.2   | 11.7min | 5.45±0.2 |
| EE16/7.7/9.3F   | 16.0±0.4           | 7.7±0.2   | 9.3±0.2   | 4.0±0.2   | 11.7min | 5.7±0.2  |
| EE16/7.8/10F    | 16.0±0.4           | 7.8±0.2   | 9.6±0.2   | 4.0±0.2   | 11.7min | 5.8±0.2  |
| EE16/7.5/10F    | 16.0±0.4           | 7.5±0.2   | 9.8±0.2   | 4.0±0.2   | 11.7min | 5.5±0.2  |
| EE16/7.5/10F    | 16.0±0.3           | 7.4±0.2   | 10.0±0.2  | 3.8±0.2   | 11.7min | 5.4±0.3  |
| EE16/7.5/15F    | 16.0±0.4           | 7.5±0.2   | 14.9±0.3  | 4.0±0.2   | 11.7min | 5.5±0.2  |
| EE17/7.5/5F     | 16.8±0.4           | 7.5±0.2   | 4.8±0.2   | 4.0±0.2   | 12.4min | 5.5±0.2  |
| EE17/7.5/8F     | 16.8±0.4           | 7.5±0.2   | 8.0±0.2   | 4.0±0.2   | 12.0min | 5.5±0.2  |
| EE17/7.5/10F    | 16.8±0.4           | 7.5±0.2   | 9.8±0.2   | 4.0±0.2   | 12.4min | 5.5±0.2  |
| EE16A/7.15/7F   | 16.0±0.3           | 7.15±0.15 | 6.8±0.2   | 3.17±0.2  | 12.7min | 5.5±0.2  |
| EF16/6.6/4F     | 16.3±0.5           | 6.6±0.2   | 4.3±0.15  | 4.55±0.15 | 12.3min | 4.35±0.2 |

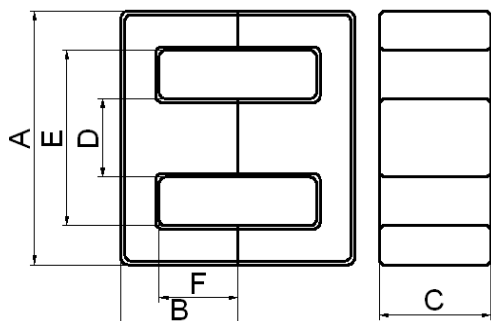

## EE型磁心 EE Cores

| 产品型号<br>Type   | 尺寸 Dimensions (mm) |            |            |            |         |            |
|----------------|--------------------|------------|------------|------------|---------|------------|
|                | A                  | B          | C          | D          | E       | F          |
| EF16/8.1/5F    | 16.1±0.4           | 8.1±0.2    | 4.5±0.2    | 4.55±0.2   | 11.7min | 6.0±0.2    |
| EE19/8.1/5F    | 19.0±0.4           | 8.1±0.2    | 4.8±0.2    | 4.8±0.2    | 13.8min | 5.8±0.2    |
| EE19/8.3/5F    | 19.0±0.4           | 8.3±0.2    | 4.8±0.2    | 4.8±0.2    | 13.8min | 5.8±0.2    |
| EE19/8.2/6.5F  | 19.0±0.4           | 8.2±0.2    | 6.5±0.2    | 4.8±0.2    | 14.2min | 5.9±0.2    |
| EE19/8.2/7F    | 19.0±0.4           | 8.2±0.2    | 7.0±0.2    | 4.8±0.2    | 14.2min | 5.9±0.2    |
| EE19/8.1/10F   | 19.0±0.4           | 8.1±0.2    | 9.5±0.2    | 4.8±0.2    | 13.8min | 5.8±0.2    |
| EE19/8.0/10F   | 19.1±0.3           | 8.0±0.3    | 9.6±0.3    | 4.5±0.15   | 14.2min | 5.7±0.2    |
| EE19/8/13      | 19.1±0.3           | 8.0±0.3    | 13.0±0.3   | 4.5±0.15   | 14.2min | 5.7±0.2    |
| EE20/10/6F     | 20.0±0.5           | 10.0±0.2   | 5.7±0.3    | 5.7±0.3    | 14.1min | 7.3±0.2    |
| EE20/10/7F     | 20.0±0.5           | 10.0±0.2   | 7.00±0.25  | 4.7±0.25   | 14.1min | 7.00±0.2   |
| EE20/10/9F     | 20.0±0.5           | 10.0±0.2   | 8.75±0.25  | 5.7±0.3    | 14.1min | 7.3±0.2    |
| EE20/10/11F    | 20.0±0.6           | 10.0±0.2   | 10.6±0.2   | 5.7±0.2    | 14.1min | 7.3±0.2    |
| EE20.4/10/6F   | 20.4±0.5           | 10.2±0.2   | 5.7±0.3    | 5.7±0.3    | 14.5min | 7.3±0.2    |
| EE21/10/6F     | 21.0±0.5           | 10.0±0.2   | 5.7±0.3    | 5.7±0.3    | 15.3min | 7.3±0.2    |
| EE22/8.45/6F   | 22.0±0.4           | 8.45±0.2   | 5.7±0.25   | 5.7±0.25   | 16.0min | 5.8±0.2    |
| EE22/9.6/6F    | 22.0±0.5           | 9.6±0.2    | 5.7±0.25   | 5.75±0.25  | 15.8min | 5.8±0.2    |
| EE23/9.15/9F   | 23.0±0.4           | 9.15±0.15  | 9.15±0.2   | 6.5±0.2    | 16.1min | 5.75±0.15  |
| EE25/10/6F     | 25.4±0.6           | 10.0±0.2   | 6.35±0.3   | 6.35±0.25  | 18.6min | 6.8±0.2    |
| EE25/12.6/7F   | 25.05±0.75         | 12.6±0.3   | 7.2±0.3    | 7.25±0.25  | 17.5min | 9.0±0.3    |
| EE25/12.6/9F   | 25.05±0.75         | 12.6±0.3   | 8.75±0.3   | 7.25±0.25  | 17.5min | 9.0±0.3    |
| EE25/12.6/11F  | 25.05±0.75         | 12.6±0.3   | 10.75±0.3  | 7.25±0.25  | 17.5min | 9.0±0.3    |
| EF25/12.55/11F | 25.3±0.5           | 12.55±0.25 | 10.65±0.25 | 7.15±0.2   | 17.9min | 9.0±0.25   |
| EE25/7/15F     | 25.0±0.5           | 6.95±0.2   | 15.0±0.3   | 7.5±0.2    | 17.8min | 3.55±0.2   |
| EE25/8/15F     | 25.0±0.5           | 7.95±0.2   | 15.0±0.3   | 7.5±0.2    | 17.8min | 4.55±0.2   |
| EE25/10/12.5F  | 25.4±0.4           | 9.9±0.2    | 12.5±0.2   | 6.35±0.3   | 19.0min | 6.7±0.2    |
| EE28.4/11/11F  | 28.4±0.4           | 11.0±0.2   | 10.75±0.3  | 7.3±0.2    | 20.3min | 6.6±0.2    |
| EE30/13.3/11F  | 30.0±0.5           | 13.3±0.3   | 10.7±0.3   | 10.7±0.3   | 19.6min | 8.3±0.3    |
| EE31/13.2/9F   | 30.7±0.6           | 13.2±0.2   | 9.4±0.3    | 9.4±0.25   | 21.8min | 8.9±0.2    |
| EE34.5/14.5/9F | 34.5±1.0           | 14.5±0.3   | 9.2±0.3    | 9.4±0.3    | 24.8min | 9.9±0.3    |
| EE35/17.6/10F  | 35.0±0.7           | 17.6±0.2   | 10.0±0.3   | 10.0±0.3   | 24.5min | 12.7±0.2   |
| EE40/17.3/12F  | 40.0±0.7           | 17.3±0.3   | 11.7±0.3   | 11.7±0.3   | 27.4min | 10.3±0.3   |
| EE42/21.1/15F  | 42.15±0.85         | 21.1±0.3   | 14.9±0.35  | 11.9±0.35  | 29.5min | 15.1±0.2   |
| EE42/21.2/20F  | 42.15±0.85         | 21.2±0.4   | 19.85±0.35 | 11.9±0.3   | 29.5min | 15.15±0.25 |
| EE55/27.5/21F  | 55.15±1.05         | 27.5±0.3   | 20.7±0.4   | 16.95±0.25 | 37.5min | 18.8±0.3   |



## EE型磁心 EE Cores

| 产品型号<br>Type    | 磁心参数 Core parameter       |            |                          |                          | AL(nH/N <sup>2</sup> ) |                 |                 |                 | 重量<br>weight<br>(g/prs) |
|-----------------|---------------------------|------------|--------------------------|--------------------------|------------------------|-----------------|-----------------|-----------------|-------------------------|
|                 | C1<br>(mm <sup>-1</sup> ) | Le<br>(mm) | Ae<br>(mm <sup>2</sup> ) | Ve<br>(mm <sup>3</sup> ) | ACP40<br>(±25%)        | ACP44<br>(±25%) | ACP47<br>(±25%) | ACP95<br>(±25%) |                         |
| EE8.3/4.5/4F    | 2.59                      | 20.92      | 8.09                     | 169.2                    | 800                    | 800             | 800             | 960             | 0.9                     |
| EE10.2/5.8/10F  | 1.18                      | 27.66      | 23.50                    | 650.0                    | 1500                   | 1500            | 1500            | 1800            | 3.3                     |
| EE10.2/5.5/5F   | 2.46                      | 28.07      | 11.40                    | 320.0                    | 800                    | 800             | 800             | 960             | 1.6                     |
| EE10.2/5.5/7F   | 1.60                      | 26.42      | 16.53                    | 436.7                    | 1300                   | 1300            | 1300            | 1560            | 2.2                     |
| EE10.6/5.5/5F   | 2.66                      | 28.70      | 10.80                    | 310.0                    | 800                    | 800             | 800             | 960             | 1.6                     |
| EE13/6.35/6F    | 1.97                      | 31.68      | 16.07                    | 509.1                    | 950                    | 950             | 950             | 1140            | 2.6                     |
| EE13/6.2/6F     | 1.95                      | 30.00      | 15.40                    | 462.0                    | 950                    | 950             | 950             | 1140            | 2.4                     |
| EE13/6.5/10F    | 0.85                      | 30.58      | 36.00                    | 1100.9                   | 2200                   | 2200            | 2200            | 2640            | 5.7                     |
| EE13.3/6.45/6F  | 2.00                      | 31.65      | 15.80                    | 500.1                    | 950                    | 950             | 950             | 1140            | 2.6                     |
| EE14/6.65/10F   | 0.89                      | 31.79      | 35.86                    | 1140.0                   | 2300                   | 2300            | 2300            | 2760            | 5.9                     |
| EE16.2/7.65/10F | 0.97                      | 37.24      | 38.45                    | 1431.9                   | 2200                   | 2200            | 2200            | 2640            | 7.4                     |
| EE16/7.5/5F     | 1.93                      | 35.60      | 18.40                    | 655.0                    | 1100                   | 1100            | 1100            | 1320            | 3.4                     |
| EE16C/7.5/5F    | 1.93                      | 35.60      | 18.40                    | 655.0                    | 1100                   | 1100            | 1100            | 1320            | 3.4                     |
| EE16/7.6/6.5F   | 1.46                      | 37.25      | 25.50                    | 949.9                    | 1400                   | 1400            | 1400            | 1680            | 4.9                     |
| EE16/7.5/7F     | 1.41                      | 37.36      | 26.50                    | 990.0                    | 1500                   | 1500            | 1500            | 1800            | 5.1                     |
| EE16/7.5/8F     | 1.13                      | 36.21      | 31.95                    | 1156.9                   | 1900                   | 1900            | 1900            | 2280            | 6.0                     |
| EE16/7.7/9.3F   | 0.98                      | 36.30      | 37.20                    | 1350.4                   | 2200                   | 2200            | 2200            | 2640            | 7.0                     |
| EE16/7.8/10F    | 1.02                      | 38.06      | 37.14                    | 1413.5                   | 2200                   | 2200            | 2200            | 2640            | 7.3                     |
| EE16/7.5/10F    | 0.94                      | 36.60      | 38.80                    | 1420.1                   | 2200                   | 2200            | 2200            | 2640            | 7.3                     |
| EE16/7.5/10F    | 0.94                      | 36.60      | 38.80                    | 1420.1                   | 2200                   | 2200            | 2200            | 2640            | 7.3                     |
| EE16/7.5/15F    | 0.61                      | 36.34      | 59.47                    | 2161.1                   | 3400                   | 3400            | 3400            | 4080            | 11.1                    |
| EE17/7.5/5F     | 1.93                      | 37.08      | 19.20                    | 711.9                    | 1100                   | 1100            | 1100            | 1320            | 3.7                     |
| EE17/7.5/8F     | 1.06                      | 36.37      | 34.19                    | 1243.5                   | 2100                   | 2100            | 2100            | 2520            | 6.4                     |
| EE17/7.5/10F    | 0.95                      | 37.08      | 39.20                    | 1453.5                   | 2000                   | 2000            | 2000            | 2400            | 7.5                     |
| EE16A/7.15/7F   | 1.72                      | 36.75      | 21.40                    | 786.5                    | 1400                   | 1400            | 1400            | 1680            | 4.1                     |
| EF16/6.6/4F     | 1.69                      | 31.34      | 18.53                    | 580.7                    | 1300                   | 1300            | 1300            | 1560            | 3.0                     |




## Ferrite Core

### EE型磁心 EE Cores

| 产品型号<br>Type   | 磁心参数 Core parameter       |            |                          |                          | AL(nH/N <sup>2</sup> ) |                 |                 |                 | 重量<br>weight<br>(g/prs) |
|----------------|---------------------------|------------|--------------------------|--------------------------|------------------------|-----------------|-----------------|-----------------|-------------------------|
|                | C1<br>(mm <sup>-1</sup> ) | Le<br>(mm) | Ae<br>(mm <sup>2</sup> ) | Ve<br>(mm <sup>3</sup> ) | ACP40<br>(±25%)        | ACP44<br>(±25%) | ACP47<br>(±25%) | ACP95<br>(±25%) |                         |
| EF16/8.1/5F    | 2.10                      | 38.92      | 18.50                    | 720.0                    | 950                    | 950             | 950             | 1140            | 3.7                     |
| EE19/8.1/5F    | 1.84                      | 40.21      | 21.84                    | 878.2                    | 1200                   | 1200            | 1200            | 1440            | 4.5                     |
| EE19/8.3/5F    | 1.81                      | 40.21      | 22.20                    | 892.7                    | 1200                   | 1200            | 1200            | 1440            | 4.6                     |
| EE19/8.2/6.5F  | 1.38                      | 40.87      | 29.60                    | 1209.8                   | 1500                   | 1500            | 1500            | 1800            | 6.2                     |
| EE19/8.2/7F    | 1.28                      | 40.94      | 32.00                    | 1310.1                   | 1600                   | 1600            | 1600            | 1920            | 6.7                     |
| EE19/8.1/10F   | 0.94                      | 40.47      | 43.00                    | 1740.2                   | 2000                   | 2000            | 2000            | 2400            | 9.0                     |
| EE19/8.0/10F   | 0.91                      | 39.95      | 44.00                    | 1757.8                   | 2400                   | 2400            | 2400            | 2880            | 9.1                     |
| EE19/8/13      | 0.67                      | 39.98      | 59.36                    | 2373.2                   | 3300                   | 3300            | 3300            | 3960            | 12.2                    |
| EE20/10/6F     | 1.55                      | 48.23      | 31.10                    | 1500.0                   | 1450                   | 1450            | 1450            | 1740            | 7.7                     |
| EE20/10/7F     | 1.26                      | 46.19      | 36.78                    | 1698.9                   | 2400                   | 2400            | 2400            | 2880            | 8.7                     |
| EE20/10/9F     | 0.99                      | 47.17      | 47.70                    | 2250.0                   | 2100                   | 2100            | 2100            | 2520            | 11.6                    |
| EE20/10/11F    | 0.81                      | 47.15      | 57.90                    | 2730.0                   | 2800                   | 2800            | 2800            | 3360            | 14.1                    |
| EE20.4/10/6F   | 1.46                      | 46.58      | 32.01                    | 1491.0                   | 1450                   | 1450            | 1450            | 1740            | 7.7                     |
| EE21/10/6F     | 1.55                      | 48.23      | 31.10                    | 1500.0                   | 1450                   | 1450            | 1450            | 1740            | 7.7                     |
| EE22/8.45/6F   | 1.33                      | 43.08      | 32.50                    | 1400.1                   | 1600                   | 1600            | 1600            | 1920            | 7.2                     |
| EE22/9.6/6F    | 1.23                      | 43.69      | 35.48                    | 1550.1                   | 1800                   | 1800            | 1800            | 2160            | 8.0                     |
| EE23/9.15/9F   | 0.71                      | 42.80      | 60.30                    | 2580.8                   | 3400                   | 3400            | 3400            | 4080            | 13.3                    |
| EE25/10/6F     | 1.27                      | 50.23      | 39.50                    | 1984.1                   | 1800                   | 1800            | 1800            | 2160            | 10.2                    |
| EE25/12.6/7F   | 1.14                      | 57.93      | 50.86                    | 2946.3                   | 1800                   | 1800            | 1800            | 2160            | 15.2                    |
| EE25/12.6/9F   | 0.94                      | 58.37      | 62.30                    | 3636.5                   | 2200                   | 2200            | 2200            | 2640            | 18.7                    |
| EE25/12.6/11F  | 0.76                      | 57.93      | 75.94                    | 4399.2                   | 2800                   | 2800            | 2800            | 3360            | 22.7                    |
| EF25/12.55/11F | 0.76                      | 57.90      | 75.90                    | 4394.6                   | 2700                   | 2700            | 2700            | 3240            | 22.6                    |
| EE25/7/15F     | 0.34                      | 35.86      | 104.12                   | 3733.7                   | 6200                   | 6200            | 6200            | 7440            | 19.2                    |
| EE25/8/15F     | 0.38                      | 39.84      | 104.29                   | 4154.9                   | 5500                   | 5500            | 5500            | 6600            | 21.4                    |
| EE25/10/12.5F  | 0.64                      | 49.59      | 78.05                    | 3870.5                   | 3600                   | 3600            | 3600            | 4320            | 19.9                    |
| EE28.4/11/11F  | 0.61                      | 52.40      | 85.80                    | 4495.9                   | 3800                   | 3800            | 3800            | 4560            | 23.2                    |
| EE30/13.3/11F  | 0.54                      | 58.50      | 109.00                   | 6376.5                   | 4000                   | 4000            | 4000            | 4800            | 32.8                    |
| EE31/13.2/9F   | 0.73                      | 60.07      | 82.80                    | 4973.8                   | 2800                   | 2800            | 2800            | 3360            | 25.6                    |
| EE34.5/14.5/9F | 0.82                      | 69.96      | 85.55                    | 5985.1                   | 2700                   | 2700            | 2700            | 3240            | 30.8                    |
| EE35/17.6/10F  | 0.81                      | 80.70      | 100.00                   | 8070.0                   | 2800                   | 2800            | 2800            | 3360            | 41.6                    |
| EE40/17.3/12F  | 0.53                      | 77.51      | 145.47                   | 11275.4                  | 3600                   | 3600            | 3600            | 4320            | 58.1                    |
| EE42/21.1/15F  | 0.55                      | 97.80      | 178.00                   | 17408.4                  | 4000                   | 4000            | 4000            | 4800            | 89.7                    |
| EE42/21.2/20F  | 0.42                      | 97.93      | 235.49                   | 23061.5                  | 5200                   | 5200            | 5200            | 6240            | 118.8                   |
| EE55/27.5/21F  | 0.35                      | 123.00     | 355.00                   | 43665.0                  | 6800                   | 6800            | 6800            | 8160            | 224.9                   |

# EE型磁心 EE Cores

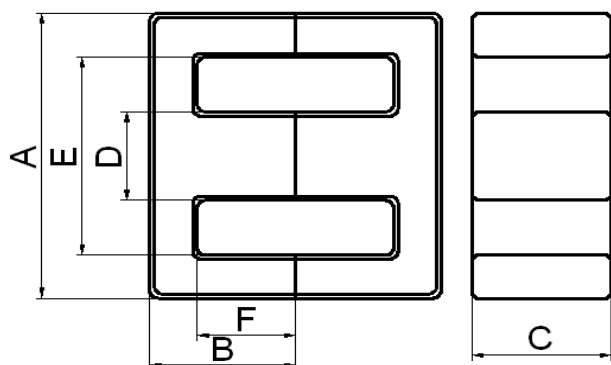

| 产品型号<br>Type   | 尺寸 Dimensions (mm) |            |           |           |          |            |
|----------------|--------------------|------------|-----------|-----------|----------|------------|
|                | A                  | B          | C         | D         | E        | F          |
| EE12.8/12/2.7F | 12.8±0.25          | 12.05±0.15 | 2.7±0.2   | 3.65±0.2  | 8.8±0.25 | 10.05±0.15 |
| EE12.8/12/3.4F | 12.8±0.25          | 12.05±0.15 | 3.42±0.2  | 3.65±0.2  | 8.8±0.25 | 10.05±0.15 |
| EE13.2/12/3.4F | 13.2±0.25          | 12.05±0.15 | 3.42±0.2  | 3.65±0.2  | 9.2±0.25 | 10.05±0.15 |
| EE19/21.2/3F   | 19.0±0.4           | 21.2±0.2   | 3.1±0.2   | 4.9±0.2   | 14.0±0.4 | 18.4±0.2   |
| EE20/11.4/5F   | 20.0±0.5           | 11.4±0.2   | 4.85±0.25 | 4.95±0.2  | 15.1min  | 9.0±0.2    |
| EE20/13.7/5F   | 20.0±0.5           | 13.7±0.2   | 4.85±0.2  | 4.95±0.2  | 15.1min  | 11.3±0.2   |
| EE20/14/4F     | 20.0±0.5           | 14.0±0.2   | 3.9±0.2   | 4.55±0.2  | 14.7±0.3 | 11.4±0.2   |
| EE20/14/5F     | 20.0±0.5           | 14.0±0.2   | 4.85±0.2  | 4.55±0.2  | 14.7±0.3 | 11.4±0.2   |
| EE21/21.6/3F   | 21.0±0.5           | 21.6±0.2   | 3.2±0.2   | 5.0±0.2   | 15.0±0.5 | 18.4±0.2   |
| EE22/15/6F     | 22.0±0.5           | 15.0±0.25  | 5.75±0.25 | 5.75±0.25 | 15.6min  | 11.0±0.2   |
| EE22.4/22.2/5F | 22.4±0.5           | 22.2±0.2   | 4.7±0.2   | 5.8±0.2   | 16.0±0.3 | 18.2±0.2   |

| 产品型号<br>Type   | 磁心参数 Core parameter       |            |                          |                          | AL(nH/N <sup>2</sup> ) |                 |                 |                 | 重量<br>weight<br>(g/prs) |
|----------------|---------------------------|------------|--------------------------|--------------------------|------------------------|-----------------|-----------------|-----------------|-------------------------|
|                | C1<br>(mm <sup>-1</sup> ) | Le<br>(mm) | Ae<br>(mm <sup>2</sup> ) | Ve<br>(mm <sup>3</sup> ) | ACP40<br>(±25%)        | ACP44<br>(±25%) | ACP47<br>(±25%) | ACP95<br>(±25%) |                         |
| EE12.8/12/2.7F | 0.20                      | 51.4       | 10.36                    | 532.5                    | 680                    | 680             | 680             | 810             | 2.7                     |
| EE12.8/12/3.4F | 0.26                      | 51.4       | 13.13                    | 674.8                    | 680                    | 680             | 680             | 810             | 3.5                     |
| EE13.2/12/3.4F | 0.20                      | 51.8       | 10.37                    | 537.1                    | 640                    | 640             | 640             | 770             | 2.8                     |
| EE19/21.2/3F   | 5.83                      | 91.08      | 15.59                    | 1420                     | 450                    | 450             | 450             | 540             | 7.3                     |
| EE20/11.4/5F   | 2.34                      | 53.9       | 23.1                     | 1250                     | 1000                   | 1000            | 1000            | 1200            | 6.4                     |
| EE20/13.7/5F   | 2.73                      | 63.2       | 23.1                     | 1460                     | 900                    | 900             | 900             | 1080            | 7.5                     |
| EE20/14/4F     | 3.70                      | 63.44      | 16.55                    | 1050                     | 700                    | 700             | 700             | 840             | 5.4                     |
| EE20/14/5F     | 2.65                      | 63.6       | 23.9                     | 1520                     | 900                    | 900             | 900             | 1080            | 7.8                     |
| EE21/21.6/3F   | 5.20                      | 92.66      | 17.7                     | 1640                     | 480                    | 480             | 480             | 570             | 8.4                     |
| EE22/15/6F     | 1.79                      | 64.3       | 36                       | 2310                     | 1200                   | 1200            | 1200            | 1440            | 11.9                    |
| EE22.4/22.2/5F | 3.23                      | 93.1       | 28.8                     | 2680                     | 787                    | 787             | 787             | 940             | 13.8                    |