



EER磁心 EERCores

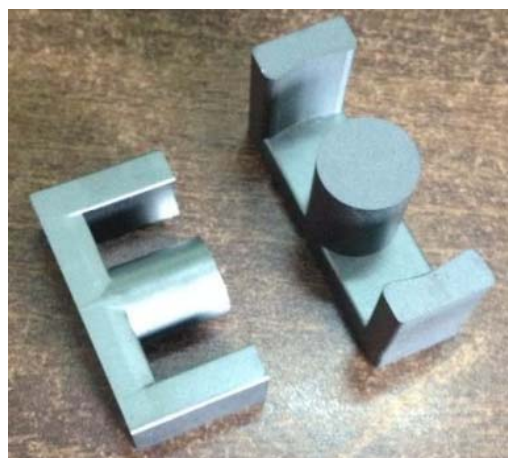

产品型号 Type	尺寸 Dimensions (mm)						
	A	B	C	D	E	F	G
EER26/5.4/10	25.7±0.5	5.4±0.2	10.0±0.3	8.1±0.2	18.50min	3.3±0.2	16.0min
EER28/10/11F	28.5±0.6	10.0±0.2	11.4±0.3	9.9±0.3	21.6min	5.6±0.2	19.0min
EER28/11/11F	28.5±0.6	11.0±0.2	11.4±0.3	9.9±0.3	21.6min	6.6±0.2	19.0min
EER28/11.7/11F	28.5±0.6	11.7±0.2	11.4±0.3	9.9±0.3	21.6min	7.3±0.2	19.0min
EER28/14/11F	28.5±0.6	14.0±0.2	11.4±0.3	9.9±0.3	21.6min	9.6±0.2	19.0min
EER28/17/11F	28.5±0.6	17.0±0.2	11.4±0.3	9.9±0.3	21.6min	12.6±0.2	19.0min
EER29/14/11F	29.4±0.6	14.0±0.3	11.4±0.3	9.9±0.3	22.7min	9.8±0.2	21.0min
EER29/17/11F	29.4±0.6	17.0±0.3	11.4±0.3	9.9±0.3	22.7min	12.7±0.3	21.0min
EER31/16.9/11F	31.4±0.6	16.9±0.4	11.4±0.3	9.9±0.3	24.9min	12.5±0.3	22.7min
EER35/20.9/11F	35.3±0.6	20.9±0.25	11.3±0.3	11.3±0.3	26.1min	15.4±0.3	24.7min
EER35/21.5/11F	35.3±0.7	21.5±0.25	11.3±0.3	11.3±0.3	26.1min	15.5±0.3	24.7min
EER36/21.2/11F	36.0±0.7	21.2±0.2	11.3±0.3	11.3±0.3	27.5min	15.25±0.3	25.7min
EER36/21.6/11F	36.0±0.6	21.6±0.2	11.3±0.3	11.3±0.3	27.5min	15.6±0.3	25.7min
EER36/22.3/11F	36.0±0.7	22.3±0.2	11.3±0.4	11.3±0.3	27.0min	16.35±0.3	25.7min
EER39/20/13F	39.1±0.9	20.0±0.4	12.5±0.4	12.5±0.3	29.3min	15.0±0.4	27.2min
EER39/21/13F	39.1±0.9	21.0±0.4	12.5±0.4	12.5±0.3	29.3min	16.0±0.35	27.2min
EER39/22.2/13F	39.1±0.9	22.2±0.2	12.5±0.4	12.5±0.3	29.3min	17.2±0.2	27.2min
EER39/22.6/13F	39.1±0.8	22.6±0.2	12.7±0.4	12.7±0.3	29.3min	17.4±0.3	27.2min
EER40/22.9/13F	40.0±0.7	22.9±0.2	13.3±0.3	13.3±0.3	29.5 min	15.9±0.3	27.2min
EER42/21.6/15F	42.0±0.8	21.6±0.3	14.7±0.3	14.7±0.3	30.5 min	15.9±0.3	27.9min
EER45/17.3/18F	45.0±1.0	17.3±0.3	17.6±0.3	17.6±0.3	33.0 min	10.75±0.3	29.4min
EER49/26.2/17F	49.0±1.0	26.2±0.3	17.2±0.3	17.2±0.3	36.5 min	19.2±0.3	33.7min

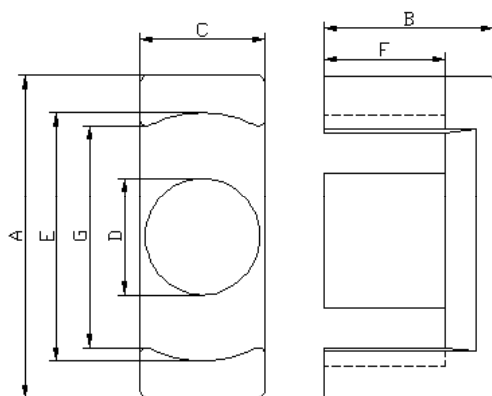

EER磁心 EERCores

产品型号 Type	磁心参数 Core parameter				AL(nH/N ²)				重量 weight (g/prs)
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	ACP40 (±25%)	ACP44 (±25%)	ACP47 (±25%)	ACP95 (±25%)	
EER26/5.4/10	0.63	31.75	50.4	1600.2	3000	3000	3000	3600	8.2
EER28/10/11F	0.55	47.23	86.4	4080.2	3800	3800	3800	4560	21.0
EER28/11/11F	0.59	50.80	85.9	4363.7	3500	3500	3500	4200	22.5
EER28/11.7/11F	0.67	54.69	81.9	4479.1	3500	3500	3500	4200	23.1
EER28/14/11F	0.78	64.00	82.1	5254.4	2800	2800	2800	3360	27.1
EER28/17/11F	0.86	73.20	85.6	6265.9	2600	2600	2600	3120	32.3
EER29/14/11F	0.78	64.00	82.1	5254.4	2800	2800	2800	3360	27.1
EER29/17/11F	0.95	76.40	80.8	6169.3	2600	2600	2600	3120	31.8
EER31/16.9/11F	0.96	77.80	81.0	6301.8	2600	2600	2600	3120	32.5
EER35/20.9/11F	0.86	93.00	108.0	10044.0	2800	2800	2800	3360	51.7
EER35/21.5/11F	0.85	93.00	109.0	10137.0	2700	2700	2700	3240	52.2
EER36/21.2/11F	0.90	95.09	106.0	10079.5	2800	2800	2800	3360	51.9
EER36/21.6/11F	0.90	95.09	106.0	10079.5	2800	2800	2800	3360	51.9
EER36/22.3/11F	0.94	99.50	106.0	10547.0	2800	2800	2800	3360	54.3
EER39/20/13F	0.74	93.80	127.0	11912.6	3200	3200	3200	3840	61.3
EER39/21/13F	0.77	97.70	127.0	12407.9	2800	2800	2800	3360	63.9
EER39/22.2/13F	0.80	102.00	127.0	12954.0	3000	3000	3000	3600	66.7
EER39/22.6/13F	0.81	103.68	127.6	13229.6	3000	3000	3000	3600	68.1
EER40/22.9/13F	0.67	100.00	149.0	14900.0	3500	3500	3500	4200	76.7
EER42/21.6/15F	0.57	97.60	171.2	16709.1	4150	4150	4150	4980	86.1
EER45/17.3/18F	0.35	81.50	233	18989.5	6500	6500	6500	7800	97.8
EER49/26.2/17F	0.52	120.90	231.4	27976.3	4200	4200	4200	5000	144.1