

EFD型磁心 EFD Cores

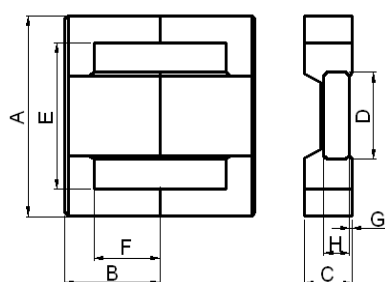


图1 Fig.1

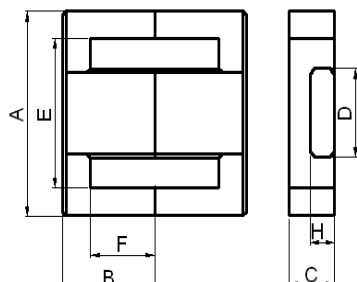


图2 Fig.2



产品型号 Type	图号 Fig	尺寸 Dimensions						
		A	B	C	D	E	F	G
EFD15/7.7/5F	1	15.7±0.3	7.7±0.2	4.7±0.2	5.4±0.2	11.8±0.3	5.7±0.2	2.4±0.15
EFD16/7.6/5F	1	16.4±0.4	7.6±0.2	4.8±0.2	5.8±0.2	12.5min	5.6±0.2	2.4±0.2
EFD20/10/7F	1	20.2±0.5	10.0±0.2	6.55±0.2	8.8±0.20	16.15±0.5	7.8±0.2	3.7±0.2
EFD21/10.3/7F	2	21.0±0.55	10.3±0.3	6.8±0.2	8.8±0.20	15.4min	8.0±0.2	3.6±0.2
EFD21.4/10/7F	1	21.4±0.4	10.0±0.2	6.55±0.2	8.8±0.20	16.6min	7.8±0.2	3.7±0.2
EFD25/12.5/9F	1	25.0±0.5	12.5±0.2	9.1±0.3	11.4±0.30	19.4±0.5	9.5±0.2	5.2±0.2
EFD25.6/12.5/9F	1	25.6±0.65	12.5±0.2	9.1±0.2	11.4±0.2	19.3min	9.3±0.25	5.2±0.2
EFD26/12.5/9F	1	26.3±0.5	12.5±0.2	9.1±0.3	11.4±0.2	20min	9.3±0.25	5.2±0.2
EFD30/15.3/9F	1	30.0±0.6	15.3±0.2	9.0±0.2	14.6±0.25	23.1min	11.5±0.2	4.9±0.15
EFD31/15.3/9F	1	31.0±0.8	15.3±0.2	9.0±0.2	14.6±0.25	23.8min	11.5±0.2	4.9±0.15
EFD33/20.3/5F	2	33.0±0.5	20.3±0.2	5.1±0.2	15.35±0.2	23.1min	15.5±0.2	3.10±0.15
EFD40/22.4/8F	2	40.3±0.6	22.4±0.2	8.0±0.2	3.8±0.2	29.5min	19.5±0.3	17.3±0.2
EFD50/25.25/8F	2	50.0±1.0	25.25±0.3	8.0±0.3	26.5±0.3	36.0min	18.5±0.3	4.0±0.25

产品型号 Type	磁心参数 Core parameter				AL(nH/N ²)				重量 weight (g/prs)
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	ACP40 (±25%)	ACP44 (±25%)	ACP47 (±25%)	ACP95 (±25%)	
EFD15/7.7/5F	2.48	36.0	14.5	522.0	800	800	800	960	2.7
EFD16/7.6/5F	1.71	48.0	28.0	1345.0	1100	1100	1100	1320	6.9
EFD20/10/7F	1.71	52.6	26.4	1391.0	1200	1200	1200	1440	7.2
EFD21/10.3/7F	1.57	49.3	31.4	1548.0	1450	1450	1450	1740	8.0
EFD21.4/10/7F	1.66	49.0	29.5	1446.1	1300	1300	1300	1560	7.4
EFD25/12.5/9F	1.09	58.8	53.7	3160.0	2000	2000	2000	2400	16.3
EFD25.6/12.5/9F	1.09	58.8	53.7	3160.0	2200	2200	2200	2640	16.3
EFD26/12.5/9F	1.04	59.5	56.8	3378.6	2000	2000	2000	2400	17.4
EFD30/15.3/9F	1.06	69.6	65.7	4570.0	2050	2050	2050	2460	23.5
EFD31/15.3/9F	0.96	67.3	69.0	4313.4	2000	2000	2000	2400	22.2
EFD33/20.3/5F	0.96	88.0	50.4	4435.2	1480	1480	1480	1776	22.8
EFD40/22.4/8F	0.96	99.9	78.3	7830.3	1800	1800	1800	2160	40.3