
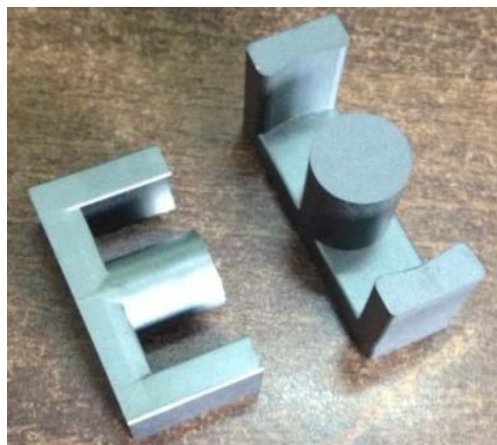


# ETD磁心 ETD Cores

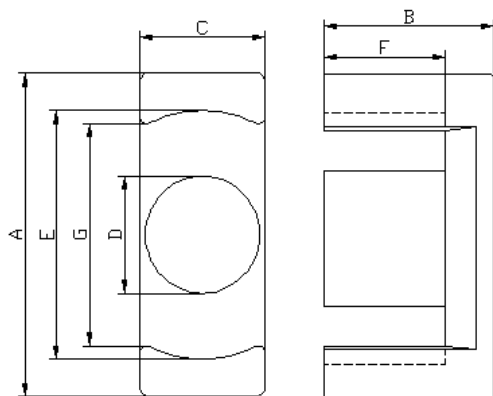

| 产品型号<br>Type   | 尺寸 Dimensions (mm) |          |          |          |          |          |         |
|----------------|--------------------|----------|----------|----------|----------|----------|---------|
|                | A                  | B        | C        | D        | E        | F        | G       |
| ETD29/15.8/10F | 29.8±0.8           | 15.8±0.3 | 9.5±0.3  | 9.5±0.2  | 22.0min  | 11.0±0.3 | 20.5min |
| ETD34/17.3/11F | 34.2±0.8           | 17.3±0.2 | 10.8±0.3 | 10.8±0.3 | 25.6 min | 12.1±0.3 | 23.6min |
| ETD34/17.5/11F | 34.2±0.8           | 17.5±0.2 | 10.8±0.3 | 10.8±0.3 | 25.6 min | 12.3±0.3 | 23.6min |
| ETD44/22.3/15F | 44.0±1.0           | 22.3±0.3 | 14.8±0.4 | 14.8±0.4 | 32.5 min | 16.6±0.3 | 30.8min |
| ETD49/24.7/16F | 49.0±1.0           | 24.7±0.3 | 16.3±0.4 | 16.3±0.4 | 36.1 min | 18.25±03 | 34.6min |

| 产品型号<br>Type   | 磁心参数 Core parameter       |            |                          |                          | AL(nH/N <sup>2</sup> ) |                 |                 |                 | 重量<br>weight<br>(g/prs) |
|----------------|---------------------------|------------|--------------------------|--------------------------|------------------------|-----------------|-----------------|-----------------|-------------------------|
|                | C1<br>(mm <sup>-1</sup> ) | Le<br>(mm) | Ae<br>(mm <sup>2</sup> ) | Ve<br>(mm <sup>3</sup> ) | ACP40<br>(±25%)        | ACP44<br>(±25%) | ACP47<br>(±25%) | ACP95<br>(±25%) |                         |
| ETD29/15.8/10F | 0.939                     | 71.54      | 76.2                     | 5451                     | 2300                   | 2300            | 2300            | 2800            | 28.1                    |
| ETD34/17.3/11F | 0.819                     | 79.1       | 96.6                     | 7641                     | 2500                   | 2500            | 2500            | 3000            | 39.4                    |
| ETD34/17.5/11F | 0.827                     | 79.9       | 96.6                     | 7718                     | 2600                   | 2600            | 2600            | 3100            | 39.7                    |
| ETD44/22.3/15F | 0.594                     | 104        | 175                      | 18200                    | 3600                   | 3600            | 3600            | 4300            | 93.7                    |
| ETD49/24.7/16F | 0.535                     | 114        | 213                      | 24100                    | 4000                   | 4000            | 4000            | 4800            | 124.1                   |