


PQ型磁心 PQ Cores



产品型号 Type	尺寸 Dimensions (mm)						
	A	B	C	D	E	F	G
PQ20/8.1/14F	20.5±0.4	8.1±0.2	14.0±0.4	8.8±0.2	17.4min	5.3±0.2	12.0min
PQ20/10.01/14F	20.5±0.4	10.1±0.2	14.0±0.4	8.8±0.2	17.4min	7.3±0.2	12.0min
PQ21/8.1/14F	21.0±0.5	8.1±0.2	14.0±0.4	8.8±0.2	18.4min	5.3±0.2	13.0min
PQ21/10.1/14F	21.0±0.5	10.1±0.2	14.0±0.4	8.8±0.2	18.4min	7.3±0.2	13.0min
PQ26/10.25/19F	26.5±0.5	10.25±0.2	19.0±0.4	12.0±0.25	22.0min	5.9±0.2	15.5min
PQ26/10.7/19F	26.5±0.5	10.7±0.2	19.0±0.4	12.0±0.25	22.0min	6.2±0.2	15.5min
PQ26/12.5/19F	26.5±0.45	12.5±0.2	19.0±0.4	12.0±0.2	22.05min	8.2±0.2	16.5min
PQ26/12.5/19	26.5±0.5	12.7±0.2	19.0±0.4	12.0±0.25	22.0min	8.2±0.2	15.5min
PQ27/10.25/19F	27.5±0.5	10.25±0.2	18.9±0.4	12.0±0.25	22.5min	5.9±0.2	17.0min
PQ27/12.5/19F	27.5±0.5	12.5±0.2	18.9±0.4	12.0±0.25	22.5min	8.2±0.2	17.0min
PQ32/9.7/22F	32.6±0.6	9.7±0.2	22.0±0.4	13.4±0.3	27.0min	5.2±0.2	19.0min
PQ32/10.25/22F	32.6±0.6	10.25±0.2	22.0±0.4	13.4±0.3	27.0min	5.75±0.2	19.0min
PQ32/10.3/22F	32.0±0.5	10.3±0.2	22.0±0.5	13.45±0.25	27.0min	5.85±0.15	19.50min
PQ32/10.7/22F	32.6±0.6	10.7±0.2	22.0±0.4	13.4±0.3	27.0min	6.2±0.2	19.0min
PQ32/12.5/22F	32.0±0.5	12.5±0.2	22.0±0.5	13.45±0.25	27.0min	8.1±0.15	19.75min
PQ32/12.7/22F	32.6±0.6	12.7±0.2	22.0±0.4	13.4±0.3	27.0min	8.2±0.2	19.0min
PQ32/14.2/22F	32.6±0.6	14.2±0.2	22.0±0.4	13.4±0.3	27.0min	9.7±0.2	19.0min
PQ32/15.2/22F	32.6±0.6	15.2±0.2	22.0±0.4	13.4±0.3	27.0min	10.7±0.2	19.0min
PQ32/17.75/22F	32.6±0.6	17.75±0.2	22.0±0.4	13.4±0.3	27.0min	13.25±0.2	19.0min
PQ32/15.2/22F	32.0±0.5	15.2±0.2	22.0±0.5	13.45±0.25	27.0min	10.65±0.15	19.50min
PQ35/17.4/26F	35.1±0.8	17.4±0.25	26.0±0.5	14.3±0.2	31.0min	12.5±0.25	23.5min
PQ38/5/21F	38.0±0.6	5.0±0.2	21.32±0.4	14.3±0.2	32.8±0.5	2.7±0.25	25.84min
PQ40/20/28F	40.5±0.9	20.0±0.2	28.0±0.5	14.75±0.25	36.0min	14.8±0.2	27.5min
PQ50/25/32F	50.0±0.8	25.0±0.2	32.0±0.6	20.0±0.4	43.3min	18.1±0.2	32.0min

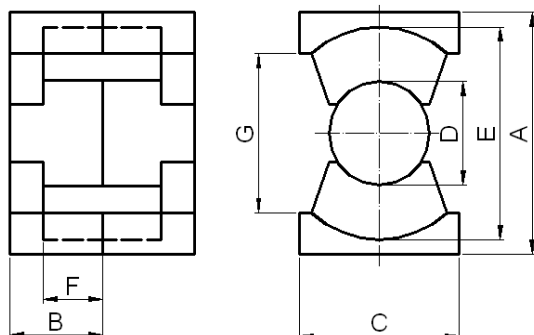

PQ型磁心 PQ Cores

产品型号 Type	磁心参数 Core parameter				AL(nH/N ²)				重量 weight (g/prs)
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	ACP40 (±25%)	ACP44 (±25%)	ACP47 (±25%)	ACP95 (±25%)	
PQ20/8.1/14F	0.62	37.80	60.53	2288.0	3200	3200	3200	3840	11.8
PQ20/10.01/14F	0.76	46.02	60.19	2769.9	2700	2700	2700	3240	14.3
PQ21/8.1/14F	0.69	38.83	56.66	2200.1	3000	3000	3000	3600	11.3
PQ21/10.1/14F	0.83	46.91	56.7	2659.8	2600	2600	2600	3120	13.7
PQ26/10.25/19F	0.38	45.32	120.5	5461.1	5500	5500	5500	6600	28.1
PQ26/10.7/19F	0.39	47.16	120.4	5678.1	5200	5200	5200	6240	29.2
PQ26/12.5/19F	0.46	55.28	120.3	6650.2	4600	4600	4600	5520	34.2
PQ26/12.5/19	0.46	55.28	120.3	6650.2	4600	4600	4600	5520	34.2
PQ27/10.25/19F	0.38	46.46	121.08	5625.4	5500	5500	5500	6600	29.0
PQ27/12.5/19F	0.46	55.65	120.4	6700.3	4600	4600	4600	5520	34.5
PQ32/9.7/22F	0.31	51.70	165.64	8563.6	6400	6400	6400	7680	44.1
PQ32/10.25/22F	0.33	54.08	165.86	8969.7	6200	6200	6200	7440	46.2
PQ32/10.3/22F	0.32	48.60	151	7338.6	6000	6000	6000	7200	37.8
PQ32/10.7/22F	0.34	56.04	166.03	9304.3	6000	6000	6000	7200	47.9
PQ32/12.5/22F	0.39	61.20	157	9608.4	5400	5400	5400	6480	49.5
PQ32/12.7/22F	0.39	64.71	166.65	10783.9	5400	5400	5400	6480	55.5
PQ32/14.2/22F	0.39	64.71	167	10806.6	5200	5200	5200	6240	55.7
PQ32/15.2/22F	0.45	75.56	167.25	12637.4	5200	5200	5200	6240	65.1
PQ32/17.75/22F	0.52	86.60	167.7	14522.8	4600	4600	4600	5520	74.8
PQ32/15.2/22F	0.46	74.60	161	12010.6	4800	4800	4800	5760	61.9
PQ35/17.4/26F	0.47	87.91	187.48	16481.4	4600	4600	4600	5520	84.9
PQ38/5/21F	0.36	39.43	108.13	4263.0	6100	6100	6100	7320	22.0
PQ40/20/28F	0.54	103.96	191.93	19952.3	4600	4600	4600	5520	102.8
PQ50/25/32F	0.36	114.60	320	36672.0	6700	6700	6700	8040	188.9