

RM型磁心 RM Cores




图1 Fig.1

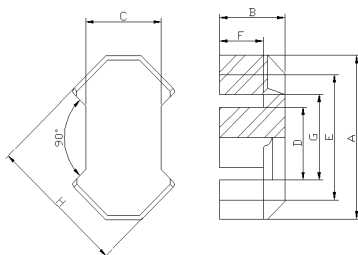


图2 Fig.2




图3 Fig.3




图4 Fig.4




图5 Fig.5

产品型号 Type	图号 Fig	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	H
RM6E/6.3/8F	1	17.6±0.3	6.3±0.2	8.0±0.3	6.3±0.2	12.4min	4.3±0.2	8.5min	14.4±0.3
RM6P/6.3/8F	2	17.6±0.3	6.3±0.2	8.0±0.3	6.3±0.2	12.4min	4.3±0.2	8.5min	14.4±0.3
RM7/6.7/7F	5	19.9±0.4	6.7±0.2	7.2±0.3	7.2±0.2	14.75min	4.33±0.2	9.3min	16.8±0.4
RM8P/8.45/11F	2	22.75±0.45	8.45±0.2	10.75±0.3	8.4±0.2	17.0min	5.75±0.2	10.9min	19.7±0.4
RM8E/8.3/11F	1	22.75±0.5	8.3±0.2	10.7±0.3	8.4±0.2	17.0min	5.6±0.2	9.7min	19.5±0.5
RM10E/9.4/13F	1	27.85±0.65	9.4±0.2	13.25±0.3	10.7±0.3	21.3min	6.45±0.2	14.0min	24.15±0.55
RM10P/9.4/13F	2	27.85±0.65	9.4±0.2	13.25±0.3	10.7±0.3	21.2min	6.45±0.2	13.3min	24.15±0.65
RM12/11.7/16F	1	36.7±1.2	11.7±0.2	15.85±0.3	12.6±0.3	24.9min	8.5±0.2	14.3min	29.8±0.6
RM14/15/19F	1	41.6±0.8	15.05±0.2	18.7±0.3	14.75±0.3	29.0min	10.55±0.2	17.9min	34.15±0.7

产品型号 Type	磁心参数 Core parameter				AL(nH/N ²)				重量 weight (g/prs)
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	ACP40 (±25%)	ACP44 (±25%)	ACP47 (±25%)	ACP95 (±25%)	
RM6E/6.3/8F	0.80	29.2	33.7	1070	2300	2300	2300	2760	5.5
RM6P/6.3/8F	0.80	29.2	33.7	1070	2300	2300	2300	2760	5.5
RM7/6.7/7F	0.68	30.0	44.1	1325	3000	3000	3000	3600	6.8
RM8P/8.45/11F	0.67	39.5	63.3	2500	3000	3000	3000	3600	12.9
RM8E/8.3/11F	0.67	41.0	61.0	2498	3000	3000	3000	3600	12.9
RM10E/9.4/13F	0.55	48.5	87.6	4252	4200	4200	4200	5040	21.9
RM10P/9.4/13F	0.54	48.4	89.7	4338.7	4200	4200	4200	5040	22.3
RM12/11.7/16F	0.36	54.4	151.4	8227.6	6000	6000	6000	7200	42.4
RM14/15/19F	0.38	73.8	194.6	14366.2	6200	6200	6200	7440	74.0